



Features

- Heavy Duty Construction
- Allen Bradley Compact Logix PLC
- Adjustable Carton Magazine
- Interlocked Barrier Guarding
- Automatic Can Collation
- Nordson/ITW Hot Melt System
- Elevated Frame For Sanitation
- Carton & Product Photo-Eyes
- Casters and Leveling Legs
- #60 Corrosion Resistant Flight Chain
- Servo Product Loader (Allen Bradley Kinetix)
- Up To 15 Cartons per Minute
- Optional Orbital Erector
- Optional Date Coding Systems
- 4, 6, 8, 9, 12, 15, 18, 24 Packs Capable

www.switchbackgroup.com



Craft Brewing Can Line Automation

AI-2H BREWPACK Jr.



Specifications

Carton Range

Minimum: 4 pack 12/16 oz.
Maximum: 24 pack 12/16 oz.

Packaging Material

SBS, CUK, Clay Coat News Chipboard

Package Type

Glue Style Flaps
Full or Split Major Flaps

Main Voltage

240VAC-3 Phase-60 Hz
480VAC-3 Phase-60 Hz (Optional)

Control Voltage

24VDC (Optional 120VAC)


Speed Range

Up to 15 Cartons Per Minute on
12 pack


Air Consumption

10 CFM @ 80 PSI

AI-2H

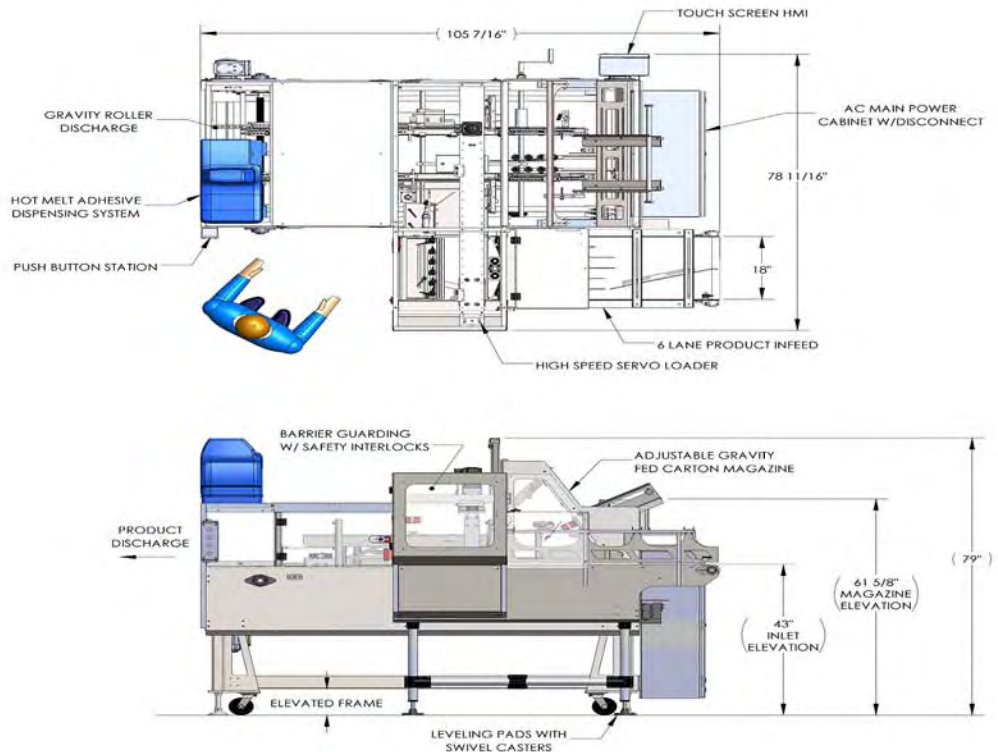

Carton Style

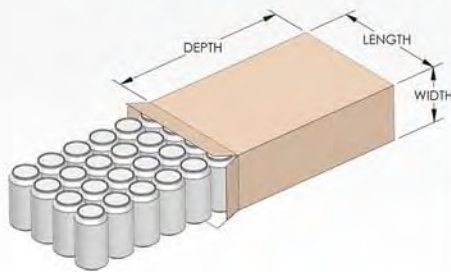

Designed to Perform

With the ability to run multiple can heights (12, 16, 19 oz.) and multiple pack patterns (2x2, 2x3, 2x4, 2x6, 3x3, 3x4, 3x5, 3x6 and 4x6) the Brewpack Jr. offers the ultimate flexibility for customers.

Ethernet based Allen Bradley PLC, variable frequency drives and servo loader allow for product control throughout the machine cycle, with recipe storage available on the color touch screen.

Sales Office

Factory Information

Switchback Group, Inc.
3778 Timberlake Drive
Richfield, OH 44286
P (330) 523-5200
F (330) 523-5212
www.switchbackgroup.com